




D4383-1F WEARPAD

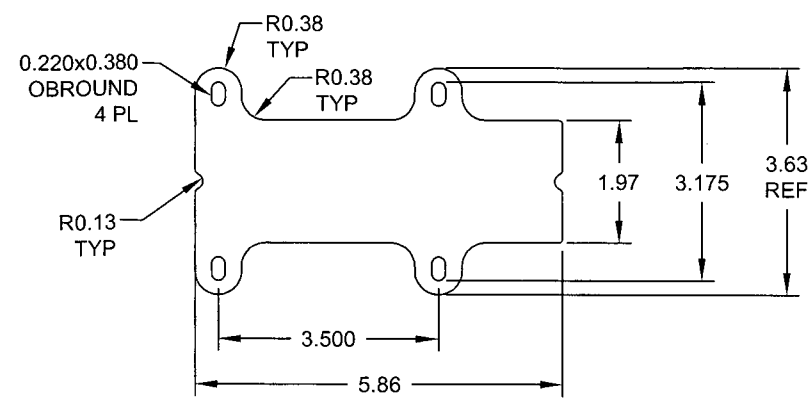


D4383-3F WEARPAD

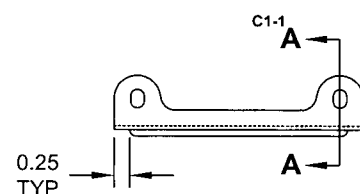

**D4383-1 WEARPAD
(MADE FROM D4383-1F)**

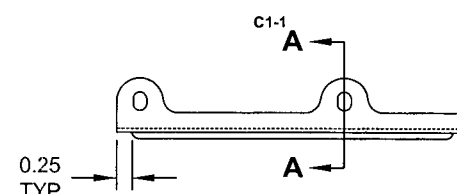

**D4383-3 WEARPAD
(MADE FROM D4383-3F)**

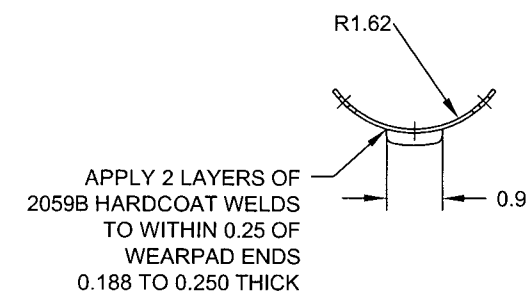

SECTION A-A
C4-1
C7-1

NOTES:

- 1) MATERIAL: AISI 304/316 STAINLESS STEEL SHEET PER AMS 5513 OR AMS 5524 OR ASTM A240 OR ASME SA240 16 GAUGE (0.063 THICK), REF DART SPEC. M304S16GA
- 2) FINISH: NONE
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) AFTER FINISH, COAT ENTIRE TOP (CONCAVE) SURFACE WITH A LAYER OF PLUS ONE ROCKGUARD 4714, 0.020-0.040 THICK
- 8) WEIGHT: D4383-1 = 0.28 lbs
D4383-3 = 0.39 lbs

RELEASED
2011-09-12
MP

A	NEW ISSUE	SC	11.06.14
REV.	DESCRIPTION	BY	DATE
DESIGN	SC	DART AEROSPACE USA, INC PORT HADLOCK, WA	
DRAWN	SC		
CHECKED	GE	DRAWING NO.	REV. A
MFG. APPR.	EE	D4383	SHEET 1 OF 1
APPROVED	MP	TITLE	SCALE
DE APPR.		WEARPLATE	NTS
DATE	11.06.14	COPYRIGHT © 2011 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	